


SBI CUSTOM BUILT

SBI Type	SBI 2
Total Weight In Air	760 kg
Total Weight In Water	312 kg
Total Length	3.65 m
Width (stowed)	2.08 m
Width (deployed)	3.54 m
Height	0.73 m
SBI 2 has previously been used on the following WROVs:	Kystdesign Supporter Schilling HD/UHD Triton XLX Quasar Type 1

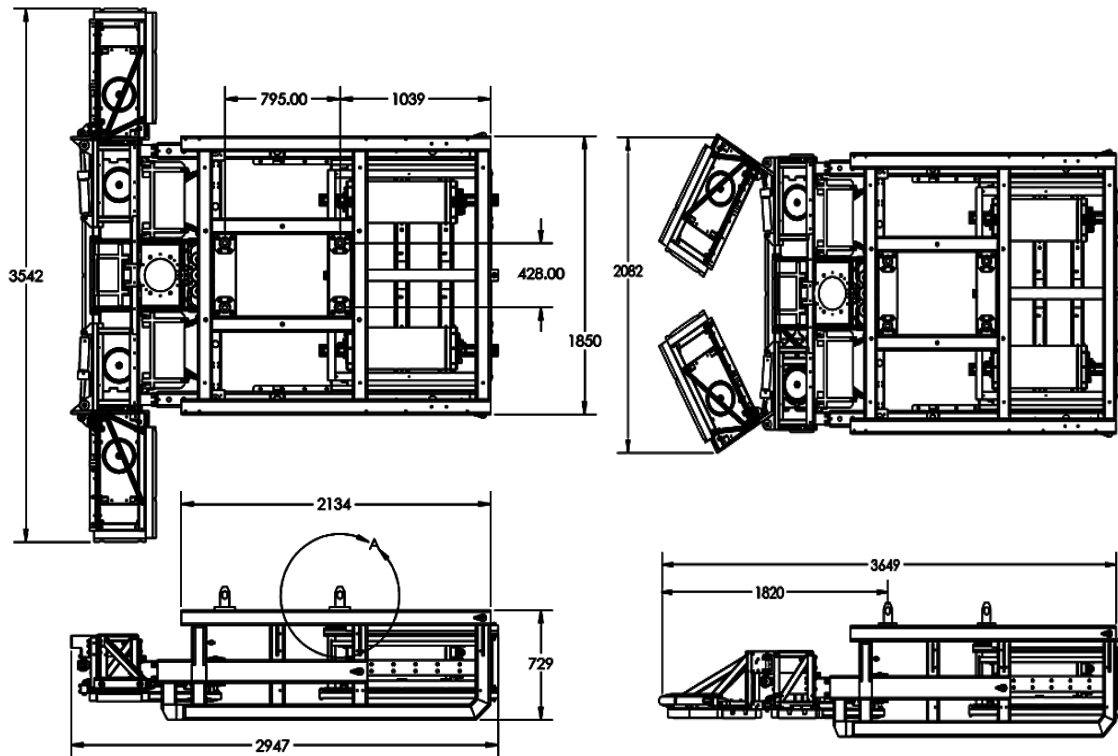

Typical SBI Scope of Supply Checklist

PanGeo Generally Supplies to Client

1. SBI Unit
2. Depth Sensor
3. Velocimeter
4. Mechanical Interface
5. Electrical Interface
6. Topside Computers and NAS
7. Competent Offshore Team (12 hour working = 1 Offshore Manager + 1 Technician / Data Processor and 24 hour working = 1 Offshore Manager + 1 Technician / Data Processor + Dedicated Data Processor)

PLEASE NOTE: We can also offer a complete One Stop Shop Survey Solution – please just ask!
We also offer to supply WROVs/ROVs, Phins/DVL or ROVINS/DVL units – full details upon request

Client Generally Supplies to PanGeo

1. Suitable Vessel
2. Positional Survey Spread (including USBL/GPS and MBES-if required)
3. WROV, ROV or suitable Platform (all common ROV 4-post interfaces accepted)
4. ROVINS/DVL
5. Mux Box Interface
6. Hydraulic Port required for wing folding (JIC4 @ 1200 psi max)
7. Power required = 115 V ac 50/60 Hz at 3 Amps running (6 Amps peak inrush)
8. Ethernet required = 1000Base-T or 100Base-T (1 Gb/sec or 100 Mb/sec)
9. Crane/FLT at Quayside for offload from flat-bed truck (max single piece weight = 1 tonne)

